

SITE LAYOUT

BUILDERS


FITOUT

PLASTERERS

SELF BUILDERS

FEATURES

Auto Levelling Auto Site Square Motorised Base Horizontal + 4x Vertical at 90° Square Plumb Up Cross, Down Dot Ni-mh and "AA" Power Includes LLR721 ir 2 Way Receiver Certificate of Calibration 2 Year Warranty

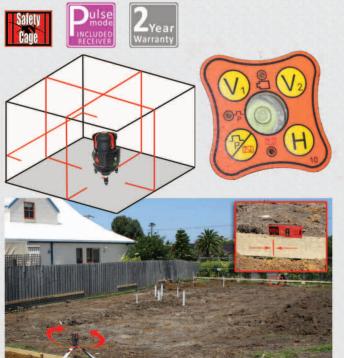

REDBACK CX510SS

Automatic Site Square Laser



The RedBack Lasers CX510SS is an auto levelling multi line laser level ideal for both indoor and outdoor applications. It features horizontal line and four vertical lines providing both vertical alignment and 90° site square layout capability. In addition the CX510SS has plumb up ceiling cross and plumb down laser dot.

Where the CX510SS differs from the CX510 is the ability to automatically set a site square. Simply set the plumb dot down over your datum, place the receiver at the other end of this datum line. Set the receiver to AUTO and the motorised base on the laser rotates the vertical lines until one is perfectly aligned with the receiver, the vertical line is now locked on along your datum line. Pick up the receiver and use it to locate the laser line at 90° to your datum line.

The CX510 comes with motorised tripod base, LLR721 receiver, Ni-mh rechargeable batteries, "AA" batteries for Base and receiver, standard "AA" battery holder, target, glasses and tripod adaptor & Plate all in a hard shell carry case.

SPECIFICATIONS

±2mm over 10m Accuracy upto 20m Visible, 60m Receiver Range (light dependant visible) class 2 635-670nm Red Beam Laser Class Self Levelling Range ±30 Horizontal Fan Angle 160° Vertical Fan Angle Ni-mh or 4x "AA" (base 6x "AA") **Power Supply** Dust/ Water Rating IP54 (dust protected and water drips) Temperature Range -10° to +40° 1.5kg Weight (laser unit)



Kit Includes; LLR721 Receiver & Clamp Laser Glasses Laser Target Laser Target Ni-mh Batteries/Charger "AA" Battery Holder Tripod Adaptor & Plate Hard Shell Carry Case

OPTIONAL **ACCESSORIES**

IET68 Indoor Tripod WB5 Wall Bracket HDF94 Outdoor Tripod 240CM3S 2.4m Staff

See Page xx